

04-18-00
ASSISTANT COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, DC 20231

A
PATENT
Date: April 17, 2000
File No. 0941.63938

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Hiroaki Eto

For: INFORMATION STORAGE DEVICE AND
DETECT INFORMATION MANAGEMENT
METHOD

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

04-17-00
Date

Express Mail Label No.: EL409492127US

Enclosed are:

- (X) 17 pages of specification, including 10 claims and an abstract.
(X) an executed oath or declaration, with power of attorney.
() an unexecuted oath or declaration, with power of attorney.
() sheet(s) of informal drawing(s).
(X) 12 sheet(s) of formal drawings(s).
(X) Assignment(s) of the invention to Fujitsu Limited.
(X) Assignment Form Cover Sheet.
(X) A check in the amount of \$40.00 to cover the fee for recording the assignment(s) is enclosed.
(X) Information Disclosure Statement.
(X) Form PTO-1449 and cited references.
() Associate power of attorney.
(X) Priority Document.

Fee Calculation For Claims As Filed

a) Basic Fee					\$ 690.00
b) Independent Claims	<u>2</u>	- 3 =	<u>0</u>	x \$ 78.00 =	\$ <u> </u>
c) Total Claims	<u>10</u>	- 20 =	<u>0</u>	x \$ 18.00 =	\$ <u> </u>
d) Fee for Multiple Claims				\$260.00 =	\$ <u> </u>
Total Filing Fee					\$ <u>690.00</u>

- (X) A check in the amount of \$ 690.00 to cover the filing fee is enclosed.
(X) The Commissioner is hereby authorized to charge any additional fees which may be required to this application under 37 C.F.R. §§1.16-1.17, or credit any overpayment, to Deposit Account No. 07-2069. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 07-2069. A duplicate copy of this sheet is enclosed.

Suite 8660 - Sears Tower
233 S. Wacker Drive
Chicago, Illinois 60606
(312) 993-0080

GREER, BURNS & CRAIN, LTD.

By:

Patrick G. Burns

Registration No. 29,367

04/17/00
09/15/20
JCS11 U.S. PTO

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

04-17-00

Date

Express Mail Label No. EL409492127US

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Hiroaki Eto, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

INFORMATION STORAGE DEVICE AND DEFECT INFORMATION MANAGEMENT METHOD

of which the following is a specification : -

TITLE OF THE INVENTION

INFORMATION STORAGE DEVICE AND DEFECT
INFORMATION MANAGEMENT METHOD

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to
an information storage device and a defect
information management method. Specifically, the
10 present invention relates to an information storage
device and a defect information management method
for managing defect information arising when
formatting a storage medium.

In recent years and continuing, an
15 information storage device such as a hard disk drive
is becoming higher density as it becomes smaller and
achieves a greater capacity. In order to store
high-density information in a storage medium, format
processing is necessary for dividing the tracks of
20 the storage medium into parts of a predetermined
number of bytes, which takes much time. Therefore,
it is required to perform format processing
effectively.

2. Description of the Related Art

25 Fig.1 is a block diagram showing a
conventional magnetic disk device. The conventional
magnetic disk device 1 mainly includes a magnetic
disk 2, a spindle motor 3, a magnetic head 4, a head
arm 5, a VCM (voice coil motor) 6, rotation axes 7,
30 8, a driver 9, a micro control unit (MCU) 10, a
flash ROM 11, a hard disk controller (HDC) 12, an
interface circuit (I/F) 12, a buffer (DRAM) 14 and
a read/write channel 15.

The magnetic disk 2 is held by the
35 rotation axis 8 of the spindle motor 3 and is
rotated in the direction of the arrow A by the
spindle motor 3. The spindle motor 3 is connected

to the MCU 10 via the driver 9 and is controlled by the MCU 10 such that the spindle motor 3 rotates at a constant speed. The magnetic head 4 is placed opposite to the magnetic disk 2.

5 The magnetic head 4 is electrically connected to the read/write channel 15. The read/write channel 15 provides a recording signal to the magnetic head 4 such that information is recorded by magnetizing the magnetic disk 2. The
10 magnetic head 4 is mechanically connected to an end of the head arm 5.

Another end of the head arm 5 is connected to the VCM 6 via the rotation axis 7. The VCM 6 is controlled by the MCU 10 via the driver 9 such that
15 the VCM 6 moves the head arm 5 in the radial direction of the magnetic disk 2, that is, in the direction of the arrow B. As a result, the magnetic head moves in the radial direction of the magnetic disk 2 such that it follows a desired track on the
20 magnetic disk 2.

The driver 9 controls the spindle motor 3 and the VCM 6. The MCU 10 performs format processing for dividing each track of the disk into recording areas of a predetermined byte length. The
25 flash ROM 11 stores processing information for the MCU 10.

The HDC 12 controls the magnetic disk 2 based on information from the interface. The interface circuit 13 is connected to the HDC 12
30 which captures information from the interface 13. The buffer 14 temporarily stores information such as processing result.

The magnetic disk 2 is formatted according to a predetermined format for writing/reading
35 information. The format processing for the magnetic disk 2 will be described in the following.

Fig.2 shows a format of the magnetic disk

0051220 044700

according to a conventional technique. As pre-processing, a plurality of servo information 16 is configured on the magnetic disk 2 radially from the rotation axis 8 of the spindle motor 3. The servo
5 information 16 includes information by which the magnetic head 4 follows the track 18 of the magnetic disk properly. The track 18 is configured concentrically around the rotation axis 8 of the spindle motor 3 and stores data. Data is stored in
10 a sector which is a data area of a predetermined byte length along the track 18.

Next, processing is performed for detecting a defect part in the recording area 17 between consecutive sets of the servo information 16.
15 The processing will be described.

Fig.3 is a flowchart showing format processing and pre-processing according to a conventional technique. When performing this processing, the MCU 10 reads out a format processing
20 procedure stored in the flash ROM 11.

In step S1, servo information 16 is written onto the magnetic disk 2. Next, in step S2, defect information is detected while following the track 18 according to servo information 16 for
25 detecting a reading error between consecutive sets of servo information in the recording area. When a reading error is detected between consecutive sets of servo information, defect information which indicates the position of the error is temporarily
30 stored in the buffer memory 14. The stored defect information is converted after format processing and stored in the flash ROM 11. When no error is detected, the processing is continued. After that, in step S3, so-called sectors are generated by
35 dividing the recording area 17 into a plurality of predetermined intervals. In this processing, slip processing is performed when an error is detected

between the consecutive sets of servo information, that is, in the sector. In the slip processing, information of the sector with the error is assigned to another sector.

5 In the format processing in step S3, when an error is detected in servo information, format processing in step 3 is aborted in the conventional technique. In the following, a track format in the above-mentioned formatting operation will be
10 described with a figure.

Fig.4 shows the track format at the time when defect information is detected according to a conventional example. Fig.4 shows a servo error 20, format processing direction 30, normal servo
15 information 40 and sectors 50. The recording area 17 is divided at regular intervals sequentially in the format processing direction 30 and addresses are provided. For example, the position of a track is determined from the servo information 40 such that
20 the track is properly followed. After that, the recording area 17 is divided into sectors of a predetermined byte length. Addresses are provided to the sectors sequentially in the processing direction from the index which is a starting point
25 of the track. For example, an address "100" is provided to a sector next to the servo information 40. Then, the sector is called sector 100. In the same way, addresses are provided to the sectors.

When the servo error 20 is detected while
30 format processing, the sector 104 in which the servo error 20 exists becomes the address of the servo error. When a servo error is detected, a next sector can not be followed properly. Therefore, the format processing is aborted due to the servo error.
35 As a result, the drive becomes inaccessible and the format processing needs to start from the beginning.

In the above-mentioned format processing,

when a servo error is detected, the track can not be properly followed. Therefore, the format processing is aborted and the drive can not be accessed. Thus, the storage medium in which the servo error is
5 detected can not be used and it is necessary to perform format processing from the beginning or to abandon the storage medium. Accordingly, the format processing can not be continued due to the servo error, which results in ineffectiveness of the
10 format processing.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide the information storage device and the
15 defect information management method for performing format processing and using the storage medium effectively.

The above object of the present invention is achieved by an information storage device which
20 stores information in recording areas generated by dividing a track, wherein track following information is configured such that a head follows the track according to the track following information, the information storage device
25 including:

a recording area setting part which divides a storage medium into predetermined recording areas;

an error detecting part which detects an
30 error in the track following information; and

a control part which controls the information storage device, wherein, when the error detecting part detects an error in the track following information while setting recording areas
35 using the recording area setting part, recording areas spanning from a recording area including the track following information having the error to a

recording area including next track following information are replaced by other recording areas and the recording area setting is restarted.

According to the above mentioned invention,
5 the information storage device has a format processing part and the error detecting part which detects an error in the track following information. By using the parts, the recording areas are replaced by slipping the recording areas, the slipped
10 recording areas including a recording area having the defect part and recording areas between the defect part and the next track following information. Thus, the format processing is restarted without interruption due to the error.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in
20 conjunction with the accompanying drawings, in which:

Fig.1 is a block diagram showing a conventional magnetic disk device;

Fig.2 shows a format of a magnetic disk
25 according to a conventional technique;

Fig.3 is a flowchart showing format processing and pre-processing according to a conventional technique;

Fig.4 shows a track format at the time
30 when defect information is detected according to a conventional technique;

Fig.5 is a flowchart showing format processing and pre-processing according to an embodiment of the present invention;

35 Fig.6 is a flowchart showing format processing in step S4 according to the embodiment of the present invention;

Fig.7 is a flowchart showing one track format processing in step S41 according to the embodiment of the present invention;

Fig.8 is a flowchart showing interrupt processing in step S5 according to the embodiment of the present invention;

Fig.9 is a flowchart showing defect adding processing step S42 according to the embodiment of the present invention;

Fig.10 shows a defect map according to the embodiment of the present invention;

Fig.11 shows a primary list or a grown list according to the embodiment of the present invention;

Fig.12 shows a track format at the time when a servo error is detected according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, an embodiment of the present invention will be described.

The configuration of a magnetic disk device of the embodiment of the present invention is the same as that shown in Fig.1. The format processing is different from that of the conventional technique.

Fig.5 is a flowchart showing format processing and pre-processing according to the embodiment of the present invention. In Fig.5, when performing the processing, the MCU 10 reads out format processing procedure stored in the flash ROM 11.

In step S1, a plurality of sets of servo information 16 are written into the magnetic disk 2. Next, in step S2, predetermined information is written into or read out of a recording area between consecutive sets of servo information 16 while

performing tracking control according to the servo information 16. The defect information is detected by finding an error. The defect information detected in step S2 is temporarily stored in the buffer memory 14. The stored error is converted for a new processing and stored in the flash ROM 11. When no error is detected, the processing is continued. After that, format processing is performed wherein the recording area 17 is divided at predetermined intervals and necessary information is written in step S4. At the time, the recording area is configured by avoiding the defect part by using the defect information detected in step S2. When an error is detected in servo information during format processing, slip processing is performed.

The format processing in step S4 will be described with a flowchart.

Fig.6 is the flowchart according to the embodiment of the present invention. In Fig.6, when defect information detected in pre-processing is stored in the buffer memory 14, the defect information is then stored in the flash ROM 11. For this, the defect information in the buffer memory 14 is cleared and the defect information is rebuilt in the flash ROM 11 in step S40. Next, in step S41, one track format processing is performed on each track. The format processing in step S41 will be described with a flowchart.

Fig.7 is the flowchart. In Fig.7, data for formatting one track is set in the buffer memory 14 from the flash ROM 11 in step S410. When data is set in the buffer memory 14 in step S410, format processing for one track is started in step S411. After that, data necessary for formatting the next track is set in the buffer memory 14 in step S412. Then, one track format processing is performed while

following the track according to the servo information until one track format processing for the track ends in step S413.

When an error in the servo information is detected during one track format in step S41, interrupt processing is performed. The interrupt processing will be described with a flowchart.

Fig.8 shows the flowchart according to an embodiment of the present invention. In Fig.8, it is determined whether the interrupt processing is normal in step S50. When it is normal, a flag which indicates normal end is set in step S51. After that, format processing is resumed.

When it is determined that the interrupt processing is not normal, it is determined whether the processing is a servo error in step S52. When it is determined that the processing is not the servo error, the information is checked whether it can be read or not in step S56 and step S57. When the processing is determined to be abnormal, a flag indicating abnormal end is set in step S58.

When the interrupt processing is determined to be the servo error, the address information of the defect information is stored in a defect map in the buffer memory 14 in step S53. After the processing of step S53, the format processing procedure is set in the buffer memory 14 again in step S54. The track format is restarted in step S55.

By storing the defect information, format processing or the like can be continued by skipping the defect part.

In step S42 in Fig.6, the defect information stored during one track format processing in step S41 is added wherein the information is categorized according to the circumstances of processing. The defect adding

processing will be described with a flowchart.

Fig.9 shows the flowchart showing the defect adding processing according to the embodiment of the present invention. In Fig.9, after the one track format processing ends, it is determined whether the situation of the processing is before shipment or not in step S420. When it is before shipment, the address of the servo error is added to the defect map in step S421. When it is after shipment, the address of the servo error is added to a defect list other than the defect map in step S422. In this way, the defect adding processing is performed by discriminating between before and after shipment. By storing defect information before or after shipment, when storing information in the recording area, the information can be stored to allow skipping the defect part using the stored defect information. The defect map in which the address is stored will be described with a figure.

Fig.10 shows the defect map according to an embodiment of the present invention. As shown in Fig.10, the defect map stores the defect information in the servo information. The defect information includes "CYLINDER" (Cyl), "HEAD" (H), "BYTE POSITION FROM INDEX" (P) and "LENGTH OF DEFECT" (L). Fig.10 shows a case in which 1-n sets of defect information exist. The "CYLINDER" (Cyl) indicates the position of the cylinder of the magnetic disk and the "HEAD" (H) indicates the position of the head. The "BYTE POSITION FROM INDEX" indicates the number of bytes between the position of the defect information and the index. The index means servo information that is the reference position for the magnetic head to follow the track. The "LENGTH OF DEFECT" is the length between the address A (shown in Fig.12) which immediately follows the defect information and the address B which is just before

the next servo information. The position of the defect information on the magnetic disk 2 is indicated by these four information items.

The one track format processing in step S41 and the defect adding processing in step S42 are repeated until all tracks are processed in step S43.

Next, in Fig.6, the added defect information which is stored in the buffer memory 14 is converted so as to optimize the information amount by the MCU 10. Then, the defect information is stored in a primary list (P-LIST) or a grown list (G-LIST) in step S44. Then, a defect management table is generated. The primary list is generated before shipment and the grown list is generated after shipment.

The primary list or the grown list will be described with a figure.

Fig.11 shows the primary list or the grown list according to the embodiment of the present invention. As shown in Fig.11, the defect information includes "CYLINDER" (Cyl), "HEAD" (H) and "SECTOR NUMBER" (S). Fig.11 shows 1-n sets of defect information corresponding to those shown in Fig.10. In "CYLINDER", the position information of the cylinder in which the defect information exists is stored. In "HEAD", the position information of the magnetic head 4 is stored. In "SECTOR NUMBER", a sector address which is converted from the byte position from index and the length of defect is stored.

As mentioned above, the format processing is performed according to the steps S40-S44. Next, a track format in the format processing will be described with a figure.

Fig.12 shows the track format at the time when a servo error is detected according to an embodiment of the present invention.

5 When the servo error 28 is detected at the time of
the format processing, the MCU 10 performs slip
processing for sectors located from the address A
which is next to the address 103 to the address B
and the sectors are replaced. Then, the format
0 processing is continued from the next address 104.

15 step. In addition, the process performed by the control part includes the steps S53-S55. The process performed by the defect information management part includes the step 42 in Fig.6.

20 present invention, when an error of track following
information (servo information) is detected, the
defect information is controlled such that the
recording area between the error and the next track
following information (next servo information) is
25 skipped. As a result, the format processing can be
continued and the drive becomes accessible. Thus,
an unusable state can be avoided and it becomes
unnecessary to restart format processing when the
error is detected. Therefore, the format processing
30 becomes effective. In addition, the storing medium
which can not be used by the conventional technique
can be used effectively according to the present
invention.

The present invention is not limited to
35 the specifically disclosed embodiments, and
variations and modifications may be made without
departing from the scope of the invention.

WHAT IS CLAIMED IS:

5

1. An information storage device which stores information in recording areas generated by dividing a track, wherein track following information is configured such that a head follows
10 the track according to the track following information, said information storage device comprising:

a recording area setting part which divides a storage medium into predetermined
15 recording areas;

an error detecting part which detects an error in said track following information; and

a control part which controls said information storage device, wherein, when said error
20 detecting part detects an error in said track following information while setting recording areas by said recording area setting part, recording areas spanning from a recording area including said track following information having said error to a
25 recording area including next track following information are replaced by other recording areas and recording area setting is restarted.

30

2. The information storage device as claimed in claim 1, further comprising a defect information management part;

35 wherein, when said error detecting part detects an error in said track following information while setting recording areas by said recording area

setting part, said defect information management
part stores position information of recording areas
spanning from a recording area including said track
following information having said error to a
5 recording area including next track following
information as defect information.

10

3. The information storage device as
claimed in claim 2, wherein said defect information
is detected before shipment and is stored as first
defect information management information.

15

4. The information storage device as
20 claimed in claim 2, wherein said defect information
is detected after shipment and is stored as second
defect information management information.

25

5. The information storage device as
claimed in claim 2, wherein, when said defect
information is detected before shipment, said defect
30 information is stored as first defect information
management information; and

when said defect information is detected
after shipment, said defect information is stored as
second defect information management information.

35

6. A defect information management method
in an information storage device which stores
information in recording areas generated by dividing
a track, wherein track following information is
5 configured such that a head follows the track
according to the track following information, said
defect information management method comprising:
a recording area setting step for dividing
a storage medium into predetermined recording areas;
10 an error detecting step for detecting an
error in said track following information; and
a control step for controlling said
information storage device, wherein, when an error
is detected in said track following information
15 while setting recording areas in said recording area
setting step, recording areas spanning from a
recording area including said track following
information having said error to a recording area
including next track following information are
20 replaced by other recording areas and recording area
setting is restarted.

25

7. The defect information management
method as claimed in claim 6, wherein, when an error
is detected in said track following information
while setting recording areas in said recording area
30 setting step, position information of recording
areas is stored as defect information, said
recording areas spanning from a recording area
including said track following information having
said error to a recording area including next track
35 following information.

8. The defect information management method as claimed in claim 7, wherein said defect information is detected before shipment and is stored as first defect information management information.

9. The defect information management method as claimed in claim 7, wherein said defect information is detected after shipment and is stored as second defect information management information.

10. The defect information management method as claimed in claim 7, wherein, when said defect information is detected before shipment, said defect information is stored as first defect information management information; and when said defect information is detected after shipment, said defect information is stored as second defect information management information.

ABSTRACT OF THE DISCLOSURE

An information storage device which stores information in recording areas generated by dividing a track is provided, wherein servo information is
5 configured, the information storage device including: a recording area setting part which divides a storage medium into predetermined recording areas; an error detecting part which detects an error in the servo information. When the
10 error detecting part detects an error in the servo information, recording areas spanning from a recording area including the servo information having the error to a recording area including next servo information are replaced by other recording
15 areas, wherein the servo error information is managed and recording area setting is restarted.

20

0051220 041700

FIG.2 PRIOR ART

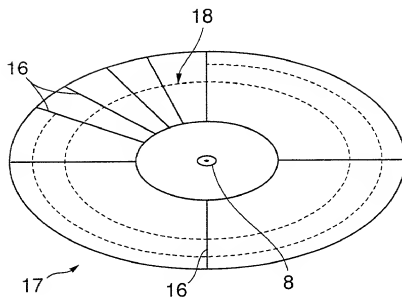


FIG. 3 PRIOR ART

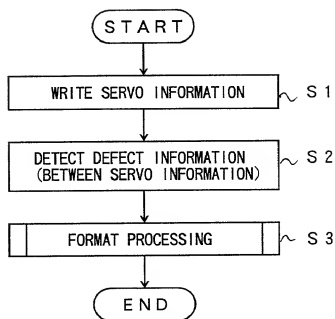


FIG. 7

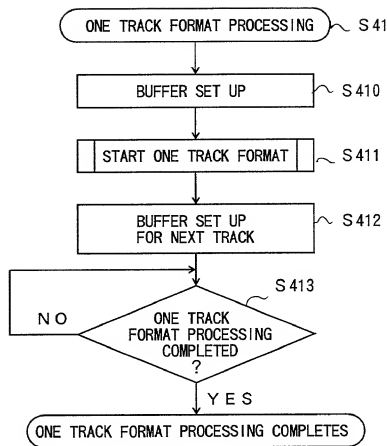


FIG. 8

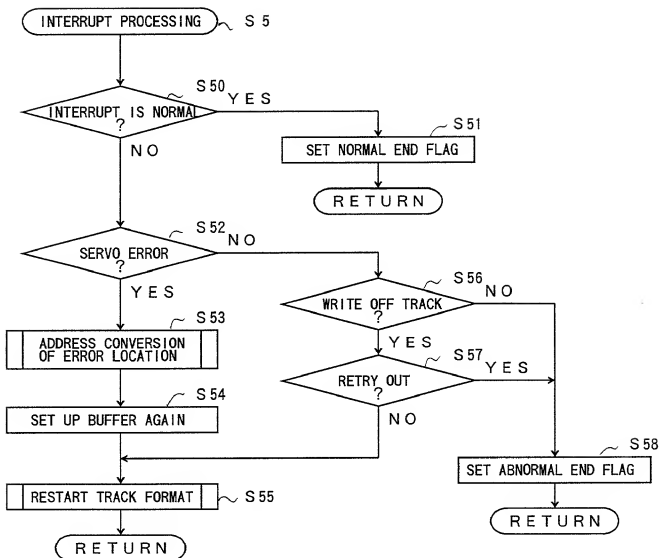


FIG. 9

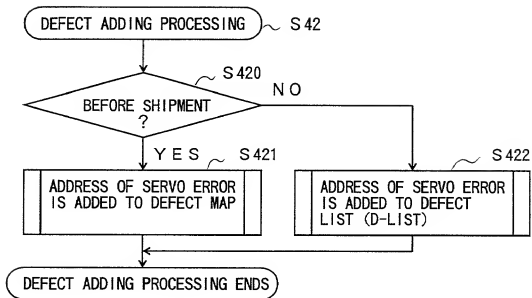


FIG. 11

CYLINDER	HEAD	SECTOR NUMBER
Cyl. 1	H. 1	S. 1
Cyl. 2	H. 2	S. 2
	⋮	
Cyl. n	H. n	S. n

00240-0221500

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私曹簿、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION STORAGE DEVICE AND DEFECT

INFORMATION MANAGEMENT METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第 3 5 編 1 1 9 条 (a)-(d) 項又は 3 6 5 条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約 3 6 5 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願 Pat. App'n. No. 11-192312	Japan (Country) (国名)
(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

私は、第 3 5 編米国法典 1 1 9 条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第 3 5 編 1 2 0 条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約 3 6 5 条 (c) に基づく権利をここに主張します。また、本出願の各項求範囲の内容が米国法典第 3 5 編 1 1 2 条第 1 項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第 3 7 編 1 条 5 6 項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第 1 8 編第 1 0 0 1 条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
 優先権主張なし

6/July/1999
 (Day/Month/Year Filed)
 (出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.86 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned) (状況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned) (状況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
 手続を米特許商標局に対して遂行する弁理士または代理人
 として、下記の者を指名いたします。(弁理士、または代理
 人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)

Attorney	Reg. No.
Patrick G. Burns	29,367
Roger D. Greer	26,174
Lawrence J. Crain	31,497
Steven P. Fallon	35,132

Attorney	Reg. No.
James K. Folker	37,538
Jonathan D. Feuchtwang	41,017
B. Joe Kim	41,895
Joel H. Bootzin	42,343

直接電話連絡先: (名前及び電話番号)

Send Correspondence to:
 Direct Telephone Calls to: (name and telephone number)
 Patrick G. Burns, Esq.
 Greer, Burns & Crain, Ltd.
 Sears Tower - Suite 8660, 233 S. Wacker Dr.
 Chicago, IL 60606 (312) 993-0080

唯一または第一発明者名

Full name of sole or first inventor

Hiroaki Eto

発明者の署名 日付

Inventor's signature Date
 Hiroaki Eto April 10, 2000

住所

Residence
 Kawasaki-shi, Kanagawa, Japan

国籍

Citizenship
 Japan

私書箱

Post Office Address
 c/o FUJITSU LIMITED,
 1-1, Kamikodanaka 4-chome, Nakahara-ku,
 Kawasaki-shi, Kanagawa, 211-8588 Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者 日付

Second inventor's signature Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)